




DIAM.	TIPO	M	L	ES	O	D	Z	A°	N	W	S	F	ER	NOTE
				0 -0.1		H7	+0.4 -0.4						MAX	
8-10	ISO	M4x0.7	10	8	6	5	27	13°	10	9	9	11	18	
12-16	ISO	M6x1	12	9	6.75	6	30	13°	11	11	10	13	20	
20	ISO	M8x1.25	16	12	9	8	36	14°	13	14	12.5	16	24	
25-32	ISO	M10x1.25	20	14	10.5	10	43	13°	15	17	15	19	28	
32	DIN	M10x1.5	20	14	10.5	10	43	13°	15	17	15	19	28	
40	ISO	M12x1.25	22	16	12	12	50	13°	17	19	17.5	22	32	
40	DIN	M12x1.75	22	16	12	12	50	13°	17	19	17.5	22	32	
50-63	ISO	M16x1.5	28	21	15	16	64	15°	23	22	22	27	42	
50-63	DIN	M16x2	28	21	15	16	64	15°	23	22	22	27	42	
80-100	ISO	M20x1.5	33	25	18	20	77	14°	27	30	27.5	34	50	
125	ISO	M27x2	51	37	25	30	110	17°	36	41	40	50	70	
160-200	DIN	M36x2	56	43	28	35	125	19°	41	50	46	58	80	
250	DIN	M42x2	60	49	33	40	142	16°	45	55	53	65	91	
320	DIN	M48x2	65	60	45	50	160	14°	58	65	65	75	115	

S43

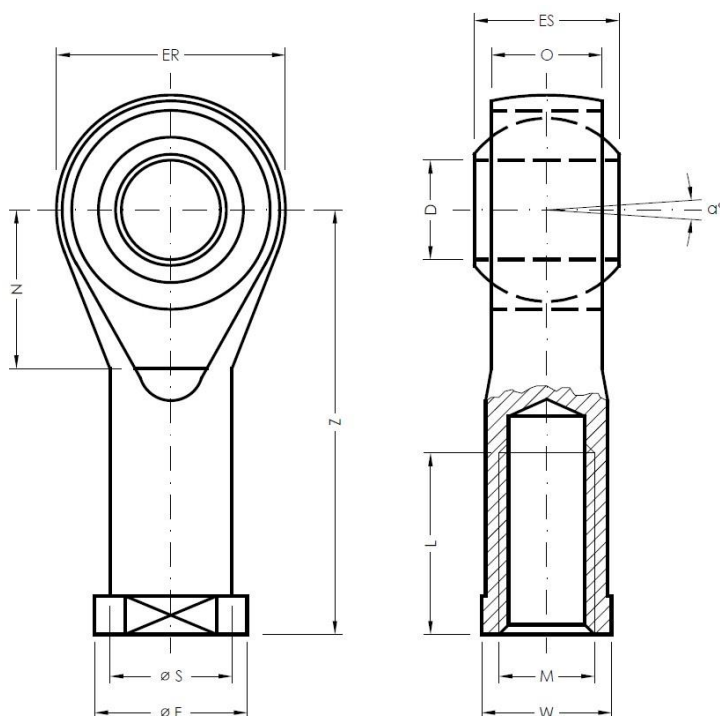

DIAMETRO	PESO (KG)	CODICE BASE
DIAMETER	WEIGHT (KG)	BASE CODE
8-10	0,018	S43M04I
12-16	0,025	S43M06I
20	0,044	S43M08I
25-32	0,072	S43M10I
32	0,072	S43M10D
40	0,110	S43M12I
40	0,110	S43M12D
50-63	0,214	S43M16I
50-63	0,214	S43M16D
80-100	0,398	S43M20I
125	1,207	S43M27I
160-200	1,668	S43M36D
250	2,400	S43M42D
320	4,730	S43M48D